

Gas and Process Division



Smart and Clean

Capital Markets Day 2006

Dré Schmitz, President Gas and Process Division

Atlas Copco

Smart & Clean

Natural Gas

Atlas Copco

Capital Markets Day - December 4, 2009

Driver for Smart and Clean
...is the growing demand for energy driven gas power station

Atlas Copco

Capital Markets Day - December 4, 2009

Increase in Primary Gas Demand

Year	Power generation	Industry	Residential and services	Other	GTL
1980	0.2	0.8	0.2	0.1	0.0
1990	0.5	1.0	0.3	0.2	0.0
2002	1.0	0.8	0.4	0.3	0.0
2010	1.5	0.8	0.5	0.3	0.0
2020	2.0	1.0	0.8	0.4	0.0
2030	2.5	1.2	0.8	0.5	0.0

Source: IEA World Energy Outlook 2004

Atlas Copco

Capital Markets Day - December 4, 2009

Distribution of Natural Gas

Pipeline



LNG carriers




CNG carriers feasibility study short distance



Atlas Copco

Global Markets Div. - December 4, 2009

LNG – Liquefied Natural Gas



Liquid form at atmospheric pressure and temperature $-161\text{ }^{\circ}\text{C}$


Reducing volume by a factor of 610

Atlas Copco

Global Markets Div. - December 4, 2009


World LNG Potential


- The 12 countries that currently export LNG have approximately 28 percent of world natural gas reserves.
- Three countries with 33 percent of the world's reserves are currently building their first liquefaction facilities.
- At least seven additional countries, with 19 % of the world's reserves, are potential LNG exporters.

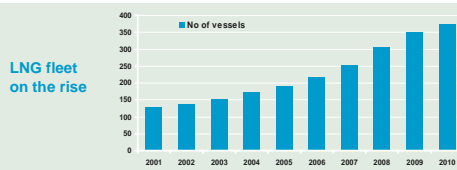


Atlas Copco


Global Markets Div. - December 4, 2009

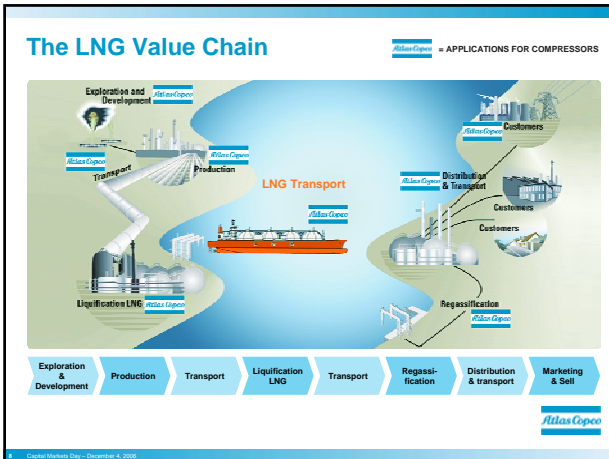

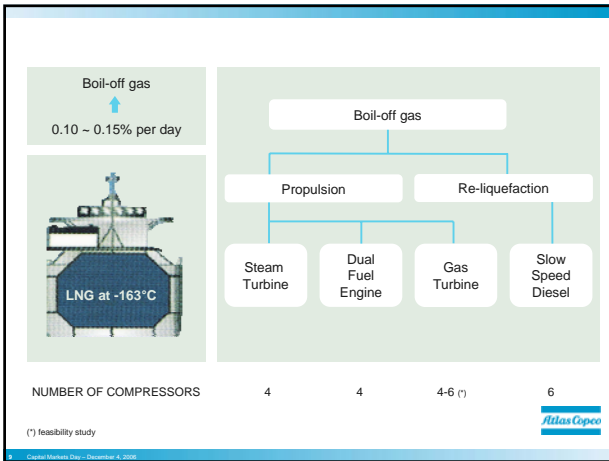

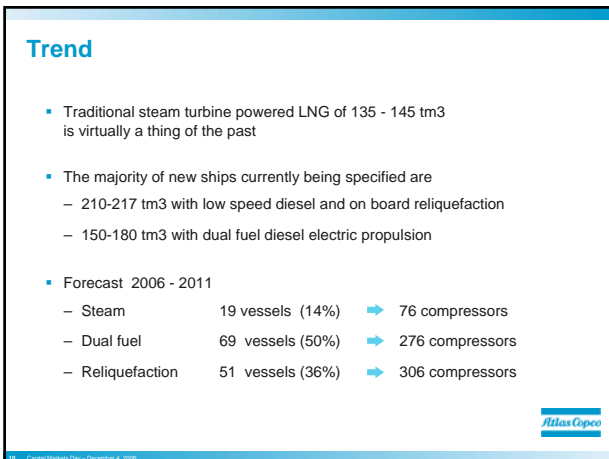


Size Comparison – HD Compressor

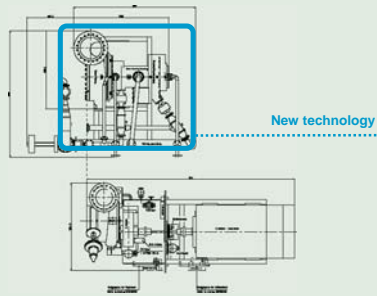

14 - Global Markets Div. - December 4, 2009


Size Comparison – LD – BOG 2 Stage

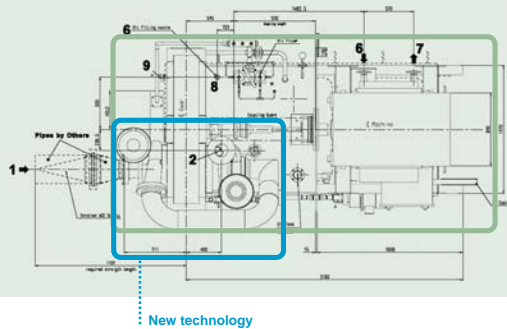

15 - Global Markets Div. - December 4, 2009

High Speed Direct Drive Compressor

New Technology



Advantages:

- Weight and space reduction
- Efficiency improvement
- No gear box required
- No lube oil system required
- Life cycle cost reduced

play movie

continue



16 - Global Markets Div. - December 4, 2009

Example for Energy Recovery

Not for LNG



Zandvliet – GT098 L4K1 + 2x ETI 450 NS

Process conditions GT098 L4K1

- Medium Air
- Inlet pressure 0.97 bar A
- Discharge pressure 10.75 bar A
- Flow 102.232 m³/hr
- Shaft power 12,310 kW

Process conditions Twin ETI 450 NS

- Medium N₂
- Inlet pressure 8.00 bar A
- Discharge pressure 1.35 bar A
- Flow 41,000 Nm³/hr each
- Shaft power 2,232 kW

Energy savings



17 - Capital Markets Day - December 4, 2020

Gas and Process Division

Summary

- LNG demand is growing 8% per year
- The growth is driven by gas power stations
- We have developed the products together with our customers
- Technology can also be used for other applications
- The technology used contributes to a better environment and energy savings



18 - Capital Markets Day - December 4, 2020

We are committed to your superior productivity through interaction and innovation.



19 - Capital Markets Day - December 4, 2020